




## Pull-wire switch

// ES 95 WH/90° 1Ö/1S - 3.2 m nylon pull-wire with rubber ball Order no.: 95014910

### Features/Options

- Version for door/gate opening: including 3.2 m long nylon pull-wire and rubber ball, slow action 1 NC/1 NO contact
- Thermoplastic enclosure
- Suitable for wall- and ceiling mounting
- Horizontal slotted mounting holes
- Double insulated

### Dimensions

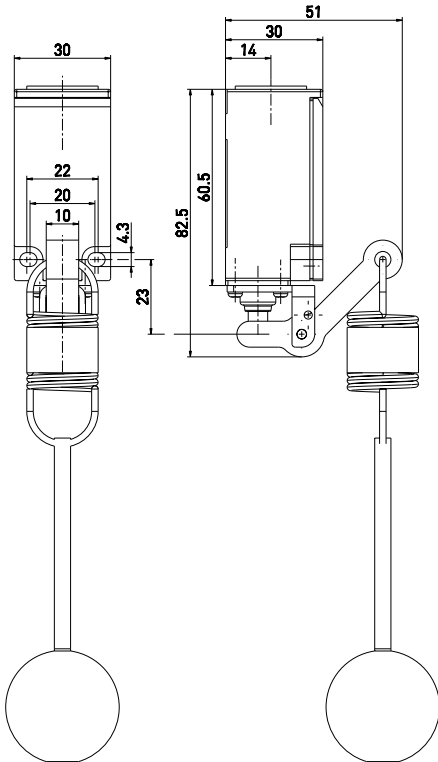


### Technical data


Standards	IEC/EN 60947-5-1
Design	DIN EN 50 047
Enclosure	glass-fibre reinforced, shockproof thermoplastic, self-extinguishing UL 94-V0
Degree of protection	IP 67 to IEC/EN 60529
Contact material	silver
Switching elements	change-over contact with double break, galvanically separated contact bridges
Switching system	slow action, positive break NC contact  to IEC 60947-5-1 screw terminals
Connection	
Cable section	max. 2.5 mm <sup>2</sup> (incl. conductor ferrules)
Cable entry	1 x M 20 x 1.5
U <sub>imp</sub>	4 kV
U <sub>i</sub>	400 V
I <sub>the</sub>	6 A
Utilisation category	AC-15; DC-13
I <sub>e</sub> /U <sub>e</sub>	6 A/400 VAC; 0.25 A/230 VDC
Max. fuse rating	6 A gL/gG D-fuse
Mech. life	> 1 million operations
Switching frequency	1800/h
Ambient temperature	- 20 °C ... + 80 °C
Contact opening	2 x 3.5 mm
Actuating force	20 N
Features	pull-wire function
Approvals	
Weight	140g

### Switching diagram

Slow action  
1 NC/1 NO contact



### Contact diagram



Errors and omissions excepted.